arietta



URBINO | Undercabinet Range Hood

Contemporary styling & gleaming color. SKU: AUR330SSA, AUR336SSA CATEGORY: Undercabinet

3000

Urbino design is ideal where undercabinet space is limited. Offering two models with a 30" and 36" width featuring a 3-speed, 300 CFM internal blower that provides an adequate ventilating power for most kitchens.

This efficient hood counts with a Dishwasher-safe anodized stainless steel mesh filters that are quick and safe to remove for an easy cleaning. Urbino was created for a standard ducted installation but can also be installed as a recirculating system using the Recirculating Kit.







2 LED lamps with 1 light intensity that safely illuminates the cooking area.


Electronic Push buttons with white backlight.

Dishwasher-safe, Anodized Stainless Steel Mesh Filters

arietta

FEATURES

Size (in)	30, 36"		
Dimensions	30"/36" W x 20″ D x 4 7/10″ H		
Finish	Stainless Steel		
Controls	Electronic Push buttons with white backlight		
Illumination	2 LED lamps (700 mA & 2.1 W , 3000 Kelvin and 235 Lumens / Lamp) 1 Light Intensity		
Blower Performance**	300 CFM, 3-Speed Internal Blower Min 2.0 - Max 4.0 sones (Noise)		
Filter Type	2 Dishwasher-Safe, Anodized Stainless Steel Mesh Filters.		
Duct Transition	3 ¼" x 10" Rectangular (top or rear) or 7" round top (sold separately)		
Electrical	120V - 60 Hz 265 Watts at 2.2 Amps		
Accessories	KIT02178Recirculation Kit 30" (contains 2 flat carbon filters & clips)KIT02179Recirculation Kit 36" (contains 2 flat carbon filters & clips)KIT02723Back Draft Damper, 7" RoundGRI0131086AStainless Steel Baffle Slot Filter for 30"GRI0131087AStainless Steel Baffle Slot Filter for 36"		

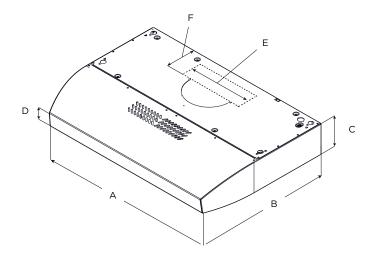

	AUR330SSA	AUR336SSA	
А	30" (76.2 cm)	36" (91.4 cm)	
В	20" (50.8 cm)		
С	4¾ " (12 cm)		
D	27⁄16" (5.7 cm)		
E	3¼" x 10" (8.3 x 25.4 cm)		
F	51⁄10"(30.4 cm)		

DESIGNED IN ITALY, MADE IN NORTH AMERICA

Five (5) Years Warranty.

One (1) Year Parts & Labor + an extra Four (4) years Parts when registering your product on www.ariettahoods.com



* The product images shown are for illustration purposes only and may not be an exact representation of the product.

** Blower performance indicates the performance of the blower by itself. Performance claims are not AHAM certified but were established in accordance with HVI Standardized test procedure. For Certified Ratings, please refer to AHAM Certified Product Directory. Electric Ratings are declared according to UL. High Speed 200 CFM, 4.5 sones (3.25 x 10" vertical), High Speed 210 CFM, 5.0 sones (3.25 x 10" horizontal), High Speed 220 CFM, 4.5 sones (7" vertical), Working Speed 130 CFM, 2.0 sones (3.25 x 10" vertical), Working Speed 130 CFM, 2.5 sones (3.25 x 10" horizontal), Working Speed 150 CFM, 2.5 sones (7" vertical)